



zBoost® SOHO ZB545

Cell Phone Signal Booster




zBoost, a leader in consumer cell phone signal boosters, offers the improved zBoost SOHO ZB545 as the solution to missed and dropped calls inside your residence. The zBoost SOHO boosts cell phone signals for voice calls and text for all major carriers.

The zBoost captures the reliable cellular signal you have outdoors and rebroadcasts it indoors, **up to 2,500 square feet**, so you can enjoy clearer, faster and more reliable service without interruption.

Everything you need is included: amplifier base unit, indoor antenna, power supply, 50 ft. of RG6 cable, external antenna, and mounting hardware.

Benefits include:

- High performing dual band signal booster - coverage **up to 2,500 sq. ft.** (up to 64 dB system gain)
- Ideal for residences that have reliable outside signal
- Reduces dropped and missed calls and can provide faster 3G data performance for multiple simultaneous users
- Boosts performance on iPhone™, Samsung™, Android™ and other phones and mobile devices
- Automatically operates at maximum gain – no manual adjustments needed
- Extends phone battery life - phone uses less power when the indoor signal is stronger
- Easy to set up - all hardware included
- Designed in Silicon Valley – Made in North America

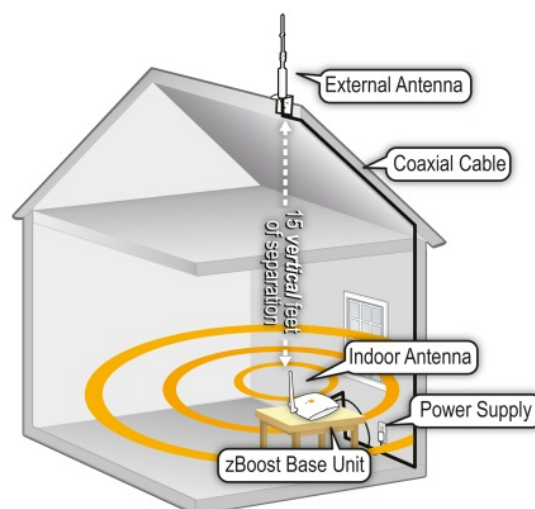

Product Specifications – SOHO ZB545	
PCS	
Frequency	1850 to 1990 MHz
System Gain	64 dB
PCS band supported	A, D, B, E, F, C
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
Cellular	
Frequency	824 to 894 MHz
System Gain	62 dB
Cellular band supported	A, B, A', B'
Networks	CDMA, GSM, GPRS, EDGE, EVDO, 1xRTT, UMTS, HSPA, 3G
General	
Power Consumption – Power Supply Current	3W standby; 7W max signal - 2.0A Max
Wall Supply Input; Voltage	100-240VAC 50-60 Hz; 5.0VDC
System Certifications	FCC Parts 15 & 20, Industry Canada
Base Unit Size and Weight	5" x 7" x 1.25" – 9 oz.
Operating Conditions	Indoor Use Only (40°- 105° F)
Coverage (open areas)	Up to 2,500 sq. ft.